


CUSTOM COOLER CONTINUOUS LINE PANELS (CLP)

CLP-600 SERIES TECHNICAL DATA

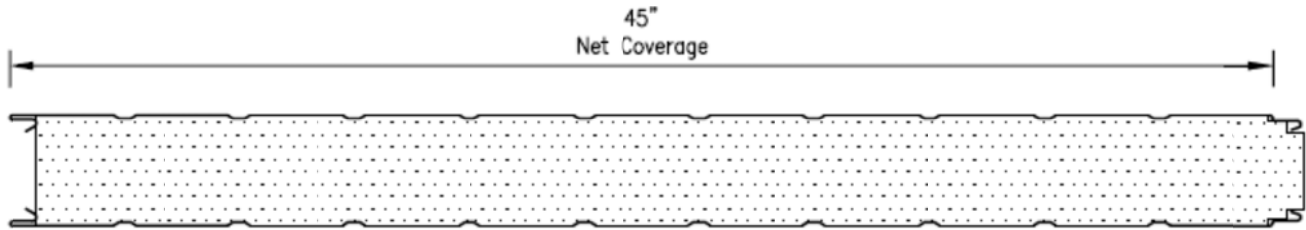

The CLP-600 Series wall and ceiling panels are ideal for cold storage, industrial and commercial facilities. The 45" wide panel arrives on site in one piece and installs quickly and economically.

SPECIFICATIONS

Panel Width: 45"

Panel Thickness: 2" – 10"

Panel Length: 6'-6" – 45'-0"

Metal Facings: 26 Gauge G-90 hot dipped galvanized (ASTM A 653) / AZ-50 coated sheet steel (ASTM A 792). 24 gauge available upon request.

Coatings: Polyester, Ceramic, Plastisol

Color: USDA White, standard. Custom colors and finishes available upon request.

Core: Minimum 1.0 Lb. Per cubic foot density expanded polystyrene (ASTM C578) CFC free. Fire retardant added.

Thermal properties: EPS at a mean temperature of 20° F, R-value 4.40 per inch. EPS at a mean temperature of 55° F, R-value 4.15 per inch.

Weight (psf): 2"- 1.99, 3"- 2.05, 4"- 2.15, 5"- 2.24, 6"- 2.37, 7"- 2.40, 8"- 2.49, 9"- 2.57, 10"- 2.65

Adhesive: Polyurethane, CFC free.

Joint Configuration: Interlocking tongue and groove

Flammability Properties Panels:

ASTM E84-95 Flame Spread Index = 0.

ASTM E84-95 Smoke Development Index = 55.

Based on 4" Thick.

ASTM tests are used solely to measure and describe properties in response to heat and flame under controlled laboratory conditions. Flame spread and smoke development ratings derived are not intended to reflect hazards under actual fire conditions. Values are reported by QAI LABORATORIES Test Report # RJ1812-1

Span Chart: Available upon request.

Surface Finish: Plain or Mesa.



420 E. Arrow Highway, San Dimas, CA 91773

Phone: 909-592-1111 Fax: 909- 599-6225